



AERNODE

Outdoor Air Quality Monitoring

Solutions for Continuous Ambient Air Measurement



Powered by  QUANTA



AERNODE

Aernode is a next-generation air quality monitoring system for outdoor environments. It delivers real-time, continuous measurements of key atmospheric pollutants and environmental conditions—providing a scalable, cost-effective alternative to traditional monitoring stations



How does it work?



1 Air Quality Monitors

Multi-pollutant AQMs for continuous outdoor monitoring.

A modular design built to support a wide range of applications.



2 Data Management

Connect to Quanta AER Cloud for an out-of-the-box solution, or integrate devices into any existing platform.



3 Data Visualization

Web-based tools for real-time monitoring, historical analysis, automated reporting, and public-facing dashboards.



AIR QUALITY MONITORS



Aernode is a modular, multipollutant outdoor monitoring system that combines high configurability with compact design. The product line includes two models — **Aernode LITE** and **Aernode PRO** —tailored for different monitoring needs, from essential deployments to advanced sensing applications.



Weatherproof Design

IP65-rated for reliable operation in any environment



Modular Architecture

Easily configured with standard and optional sensors



Compact Design

Fits discreetly into urban and industrial settings



Quick Installation

Plug-and-play setup minimizes deployment time

SPECIFICATIONS

Connectivity	Multiband Cellular
	Wi-Fi, Modbus RTU (RS485)
Transmission Frequency	30 sec to 60 minutes
GNSS	GPS
Power Supply	12 - 24 Vcc 6W
Enclosure	ABS Water resistance IP 65
Optimal Temp. Range	- 20 + 50 °C - 4 + 122 °F
Weight & Size (L x H)	1.2 kg (2.64 lb) - 90 x 230 mm (3.54" x 9.05")






SENSORS

Standard Sensors	Temperature
	Relative Humidity
	Atmospheric Pressure
	PM 1 · PM 2.5 · PM 4 · PM 10
Optional Sensors	CO2 · T.VOC Index · Sound Level Meter
	NO2 · O3 · CO · SO2 ·
	H2S · NO · CL · HCL · PH3 · HCN · PH3 · ETO
	T. VOC (PID) · H2O2

SYSTEM ARCHITECTURE

CORE SENSOR BOARD

The Core Sensor Board is integrated into every Aernode device as the default sensing layer. It includes standard environmental sensors and supports a limited number of optional sensors—enabling basic customization without the need for additional modules.

STANDARD SENSORS	 Air Temperature	 Relative Humidity	 Atmospheric Pressure	 PM 1 · PM 2.5 PM 4 · PM 10
OPTIONAL SENSORS	 Carbon Dioxide	 T.VOC Index	 Sound Level Meter	

SENSOR DECK MODULE

The Sensor Deck is an optional expansion module that extends the sensing capabilities of Aernode. It allows integration of up to 4 additional sensors on **Aernode LITE**, and up to 8 on **Aernode PRO**.



AERNODE LITE



Nitrogen Dioxide



Ozone



Hydrogen Sulfide



Ethylene Oxide



Phosphine



Hydrogen Peroxide

AERNODE PRO



Carbon Monoxide



Sulfur Dioxide



Hydrocyanic Acid



Nitrogen Monoxide



Chlorine



Hydrochloric Acid



Volatile Organic Compounds

INSTALLATION

Aernode devices are designed for quick installation and rapid deployment. They can be mounted in a variety of urban and industrial environments—no complex infrastructure or specialized tools required.



Traffic Light Pole



Bus Shelter



Urban Furniture



Wall Mount



Public Lighting



Building Facade



Data Local Output

Power Supply

LCD Display

Air Intake Ports



Multiband Cellular

For wide-area mobile data, or Modbus RTU for local industrial communication



Plug-and-play installation

Aernode can be deployed in most settings with just a basic power connection



Accessories

Solar panels, mounting brackets, and tripods to support your installation needs

Smart Maintenance, Minimal Downtime.

Designed for maximum efficiency with flexible servicing options tailored to your needs.



In-Field Full Sensor Pack Replacement



Receive a preassembled,
preconfigured sensor pack
with all sensors



Swap on-site in seconds
no tools, no downtime



Best for fleet-wide servicing and
minimizing operational disruption



In-Lab Single Sensor Replacement



Receive replacement
sensors or send the unit
to an authorized partner



Replace individual
sensors as needed in lab



Cost-effective option for
targeted servicing



Remote Management


Configure, monitor, and troubleshoot your devices without on-site visits. Remote capabilities include: Provisioning & diagnostics, transmission settings and firmware updates. This reduces downtime, cuts costs, and enables scalable deployment across large networks.

DATA MANAGEMENT

Connect devices to any data management platform, or leverage our out-of-the-box solution

Quanta AER Cloud gives you complete control over your monitoring network: configure devices, manage fleets, apply calibrations, and monitor performance in real time.

Export historical data for reporting and integrate seamlessly with external systems via secure APIs.

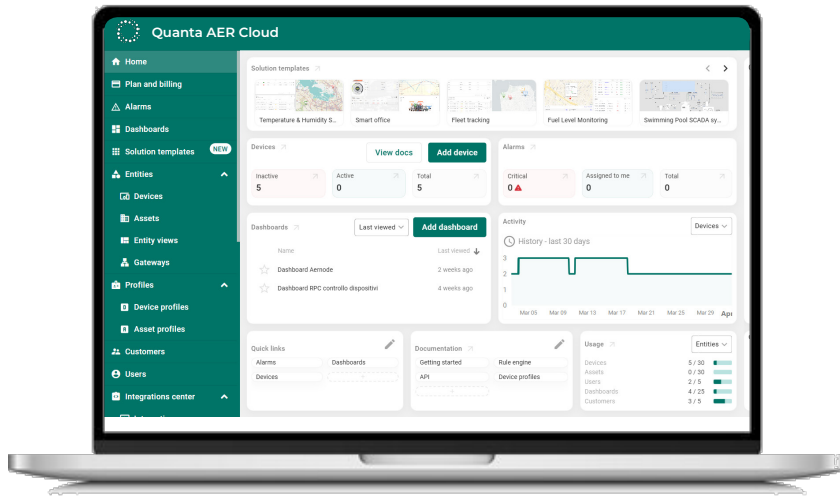

Configure & Manage

Set project parameters, deploy devices, and oversee them throughout their lifecycle



Calibration Control

Apply and update calibrations independently with full version control



Secure API Integration

Use authenticated APIs to connect data streams securely with other platforms

DATA VISUALIZATION

Transform Air Quality Data Into Actionable Insights

We provide a suite of web-based tools for air quality visualization, reporting, and communication. From private dashboards for advanced analytics to public-facing views for stakeholder engagement, our platform supports both internal decision-making and external transparency.



Private Dashboards & Analytics

Secure, user-specific dashboards for detailed analysis, custom filters, and advanced metrics



Public Sharing & Communication

Share dashboards publicly to increase transparency, inform stakeholders, and support community awareness.



Automated Reporting & Alerts

Generate scheduled reports, receive alert notifications on threshold breaches, and streamline monitoring workflow

APPLICATIONS

Designed for adaptability, the monitoring system can be deployed across diverse outdoor environments—supporting a broad range of air quality monitoring scenarios.



Continuous Ambient Air Measurement

A scalable, modular solution designed to monitor a wide spectrum of pollutants



Odor Control

Track short-term gas variations commonly associated with odor events



Pollution Source Monitoring

Monitor pollution hotspots and analyze dispersion dynamics

Sensor configurations can be tailored to each application, enabling targeted monitoring of pollutants most relevant to specific industrial, urban, and environmental settings.



Industrial Areas

NO_2 | O_3 | CO | SO_2 | H_2S | NO | VOC | PM



Smart City

NO_2 | O_3 | CO | PM



Water Treatment Plants

NO_2 | O_3 | CO | H_2S | NO | VOC | PM



Port Areas

NO_2 | O_3 | CO | SO_2 | NO | PM



Traffic and Urban Areas

NO_2 | O_3 | CO | NO | PM | Noise



Construction and Demolition Sites

NO_2 | O_3 | CO | SO_2 | PM | Noise



Landfills and Waste Treatment

NO_2 | O_3 | CO | H_2S | NO | VOC | PM



Intensive Farming

NO_2 | O_3 | CO | H_2S | VOC | PM

A complete suite of services is available to support every stage of an air quality monitoring project—from deployment to data analysis.



Training & Onboarding

Hands-on programs to equip your team with the knowledge needed to operate, interpret, and manage air quality monitoring systems.



Sensors Maintenance

Flexible in-lab and field-based servicing options tailored to your needs—ensuring long-term reliability and accuracy.



Data Analysis & Report

Advanced analytics and reporting services to help you extract insights and inform air quality decisions.



Set-Up & Configuration

Expert support to configure and deploy monitoring networks tailored to your application, environment, and connectivity needs.



Remote Diagnostic

Continuous assistance for remote troubleshooting, firmware updates, and network monitoring—minimizing downtime and site visits.



Dashboard Customization

Tailored support for setting up public or private dashboards, aligned with your reporting and stakeholder engagement needs.



SENSOR SPECIFICATIONS

 Sensors	Sensor Type	Measurement Range ¹	Recommended Measurement Range ²		Operational Resolution ³		LOD Limit of Detection ⁴		Operating RH% Range ⁵	Operating °C Range ⁶
Temperature	Solide State	- 40 + 80 °C	- 20 + 70 °C		± 0.3 °C		-		-	-
Relative Humidity	Solide State	0 - 100 %	0 - 100 %		± 2 %		-		-	-
Atmospheric Pressure	Solide State	300 to 1,100 hPa	500 to 1,100 hPa		± 0.6 hPa		-		0 - 100 %	- 20 + 70 °C
PM 1 - 2.5 - 4 - 10	Optical Particle Counter	0 - 1,000 µg/m ³	0 - 1,000 µg/m ³		1 µg/m ³		1 µg/m ³		0 - 90 %	- 10 + 50 °C
Sound Level Meter	Phonometer (class 2)	30 - 120 dB	30 - 120 dB		± 0.5 dB		30 dB		25 - 90 %	- 20 + 60 °C
T.VOC (Index)	MOX	1 - 500 Index pts	-1 - 500 Index pts	0 -1,000 ppm	1 Index pt		0.05 ppm		0 - 90 %	- 10 + 50 °C
CO ₂	NDIR	400 - 5,000 ppm	400 - 5,000 ppm		± 50 ppm		400 ppm		15 - 90 %	- 30 + 50 °C
NO ₂	Electrochemical	0-20 ppm	0-540 ppb	0-1,000 µg/m ³	≤ 5 ppb	≤ 9.4 µg/m ³	5 ppb	9.4 µg/m ³	15 - 85 %	-30 + 40 °C
O ₃	Electrochemical	0-20 ppm	0-400 ppb	0-800 µg/m ³	≤ 5 ppb	≤ 10 µg/m ³	15 ppb	28 µg/m ³	15 - 85 %	-30 + 40 °C
CO	Electrochemical	0-500 ppm	0-9 ppm	0-10 mg/m ³	≤ 0.1 ppm	≤ 0.12 mg/m ³	0.1 ppm	0.12 mg/m ³	15 - 90 %	-30 + 50 °C
SO ₂	Electrochemical	0-50 ppm	0-488 ppb	0-1,250 µg/m ³	≤ 5 ppb	≤ 13 µg/m ³	35 ppb	90 µg/m ³	15 - 90 %	-30 + 50 °C
NO	Electrochemical	0-20 ppm	0-650 ppb	0-1,000 µg/m ³	≤ 5 ppb	≤ 6 µg/m ³	20 ppb	25 µg/m ³	15 - 90 %	-30 + 50 °C
H ₂ S	Electrochemical	0-50 ppm	0-570 ppb	0-800 µg/m ³	≤ 5 ppb	≤ 7 µg/m ³	5 ppb	7 µg/m ³	15 - 90 %	-30 + 50 °C
T.VOC	PID	0-40 ppm	-	-	≤ 3 ppb	-	1 ppb	-	0 - 95 %	-20 + 60 °C

- Measurement range:** concentration range measured by the sensor. It defines the limits within which the sensor can operate without suffering permanent damage or significant loss of linearity;
- Recommended measurement range:** It defines the concentration range within which the sensor operates with optimal accuracy, stability, and data quality;
- Operational resolution:** the smallest concentration increment considered significant for ensuring the quality and repeatability of the measurement;
- LOD (Limit of Detection):** the limit of detection is the minimum concentration that can be detected as significantly different at zero gas concentration
- Operating humidity range** (recommended humidity range): the range of humidity levels within which the sensor is designed to operate safely and provide accurate measurements.
- Operating temperature range:** the temperature range within which the sensor can operate safely and provide accurate measurements.



KEY BENEFITS

Designed for real-world deployments, Aernode combines flexibility, reliability, and seamless integration to support projects of any size or complexity.



Modular System Design

Aernode's modular hardware and flexible sensor architecture let you tailor each device to the specific needs of urban, industrial, or environmental monitoring.



Customizable for Any Application




Easy Servicing & Maintenance

Tool-free sensor replacement and versatile service options reduce maintenance effort, cut downtime, and lower total cost of ownership over time.



Lower Downtime, Lower Costs



Open Architecture

Connect to your existing infrastructure or use our turnkey data and reporting tools. Aernode adapts to your system, not the other way around.



Flexible Integration or Turnkey Use



WORK WITH US

JOIN A GLOBAL NETWORK OF INNOVATION

PARTNER WITH US TO EXPAND ACCESS TO SCALABLE AIR QUALITY SOLUTIONS WORLDWIDE.

DISCOVER OUR PARTNER PROGRAM AND BECOME AN OFFICIAL DISTRIBUTOR.



INNOVATION AND RELIABILITY FOR INDUSTRY AND THE ENVIRONMENT

Quanta S.r.l.

Via A. Ferrarin, 19-23, 50145 FIRENZE (FI) - Italy

VAT n° IT04273220485

Phone.: + 39 055 3024555

aernode@quanta.it


www.quanta.it




AERNODE


Outdoor Air Quality Monitoring

Solutions for Continuous Ambient Air Measurement

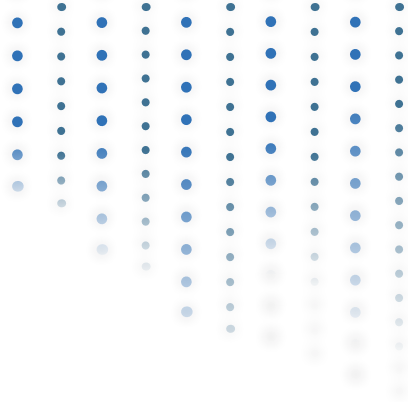


Quanta S.r.l.

 Via A. Ferrarin 19 - 23, 50145 Firenze (FI), Italy

 Phone : + 39 055 3024555

 e-mail : aernode@quanta.it

 website : www.quanta.it



www.aernode.io



aernode@quanta.it

